

Testing of the micro-cogenerator TOTEM 20 manufactured by TOTEM Energy

Steady state tests at diverse net electric powers
and inlet temperatures of cogeneration water

December 2015



POLITECNICO
MILANO 1863

Dipartimento di Energia

Prof. Stefano Campanari

Prof. Gianluca Valenti

Ing. Claudio Pirrone

Ing. Antonino Ravidà

Testing of the micro-cogenerator TOTEM 20 manufactured by TOTEM Energy S.r.l.

Abstract

The micro-cogenerator TOTEM 20 manufactured by TOTEM Energy S.r.l. is tested experimentally at the Laboratory of Micro-Cogeneration¹ of Politecnico di Milano to determine its electric and thermal performances under diverse working conditions. A working condition is a steady state operation defined by the controlled parameters: temperature of the ambient at 25°C mass flow rate of the cogeneration water at 1.11 kg s⁻¹ (4.00 m³ h⁻¹) and inlet temperature of the cogeneration water at alternatively 35 and 70°C, and net electric power at alternatively 5, 7.5, 10, 15, 20 and 25 kW. Every working condition is verified repeatedly at least four times over at least two days. The thermodynamic models employed for determining the performances from the recorded data are based on the technical information by the U.S. National Institute of Standards and Technology (NIST) and by the International Association for the Properties of Water and Steam (IAPWS). The data acquired during a single test are post-processed as follows. First, the averaged values of all measures for each working condition are evaluated. Then, the performances for each test are assessed and, simultaneously, the instrumental, combined and extended (coverage factor of 2) uncertainties are calculated by way of the standard ISO IEC GUIDE 98-3. Subsequently, all tests at each working condition are verified for compatibility applying statistical methods.

The main energy performances, referred to the Lower Heating Value (LHV) of the consumed natural gas, at the working conditions of all net electric powers and of the inlet temperature of the cogeneration water at 35 and 70°C, all expressed at a 95%-level of confidence, are:

Water inlet temperature (setpoint)		35°C					
Net electric power (setpoint)		5 kW	7.5 kW	10 kW	15 kW	20 kW	25 kW
Number of <i>compatible</i> tests		4	5	5	4	5	4
Net electric power (measured) kW		4.96 ±0.08	7.45 ±0.04	9.94 ±0.09	14.90 ±0.05	19.93 ±0.06	24.83 ±0.07
Thermal power kW		23.4 ±0.4	27.1 ±0.2	30.9 ±0.2	39.4 ±0.4	48.4 ±0.2	57.6 ±0.5
Net electric efficiency (LHV) -		0.181 ±0.002	0.226 ±0.002	0.255 ±0.004	0.296 ±0.003	0.311 ±0.005	0.325 ±0.005
Thermal efficiency (LHV) -		0.857 ±0.009	0.821 ±0.005	0.794 ±0.008	0.781 ±0.003	0.756 ±0.016	0.755 ±0.006
Total efficiency (LHV) -		1.038 ±0.009	1.046 ±0.006	1.050 ±0.011	1.077 ±0.003	1.068 ±0.021	1.080 ±0.010

Water inlet temperature (setpoint)		70°C					
Net electric power (setpoint)		5 kW	7.5 kW	10 kW	15 kW	20 kW	25 kW
Number of <i>compatible</i> tests		5	4	4	4	5	5
Net electric power (measured) kW		5.01 ±0.17	7.42 ±0.02	9.83 ±0.05	14.91 ±0.06	19.88 ±0.04	24.85 ±0.09
Thermal power kW		20.4 ±0.2	23.5 ±0.3	27.0 ±0.3	34.3 ±0.5	41.67 ±0.04	50.0 ±0.4
Net electric efficiency (LHV) -		0.182 ±0.005	0.223 ±0.004	0.252 ±0.003	0.295 ±0.001	0.312 ±0.005	0.324 ±0.003
Thermal efficiency (LHV) -		0.742 ±0.006	0.708 ±0.018	0.692 ±0.008	0.677 ±0.010	0.653 ±0.010	0.653 ±0.007
Total efficiency (LHV) -		0.924 ±0.008	0.931 ±0.022	0.944 ±0.011	0.972 ±0.010	0.965 ±0.015	0.977 ±0.009

¹ <http://www.gecos.polimi.it/laboratories/micro-cogeneration.php>

1 Introduction

TOTEM Energy S.r.l. and Politecnico di Milano are collaborating on a research program for testing, at both steady state and at cyclic or transient conditions, a number of micro-cogenerators manufactured by TOTEM in the Laboratory of Micro-Cogeneration at Politecnico. This laboratory is an infrastructure for testing in general cogeneration and trigeneration units fueled by natural gas, hydrogen, synthetic gas or any mixtures of the previous as well as for testing heat pumps, absorption chillers and boilers. Systems are characterized in terms of energy and environmental performances, allowing to improve if necessary physical components and control logics [1].

This work outlines the activities conducted specifically on the micro-cogenerator TOTEM 20, a unit capable of generating electrical power up to 25 kW, to determine its electric and thermal performances under diverse working conditions. A working condition, as defined here, is a steady state operation of the cogenerator identified by the following controlled parameters:

- temperature of the ambient air inside the laboratory at 25°C,
- mass flow rate of the cogeneration water at 1.11 kg s⁻¹ (that is 4.00 m³ h⁻¹),
- inlet temperature of the cogeneration water at alternatively 35 and 70°C,
- net electric power at alternatively 5, 7.5, 10, 15, 20 and 25 kW.

In particular, the net electric power is imposed before each test defining properly the set point of the gross electric power, which is editable via the control panel of the cogenerator.

In order to verify the repeatability and to improve the confidence of the results, each working condition is replicated at least four times over at least two different days. During a single test at a given working condition, the following measurements are acquired (the underlined ones are also controlled as seen above):

- barometric pressure, temperature and relative humidity of the ambient air,
- mass flow rate, pressure, temperature and composition of the consumed natural gas,
- temperature of the exhaust gas,
- mass flow rate, pressure, pressure drop, inlet temperature and outlet temperature of cogen water,
- mass production of the condensate water over time,
- current, tension, power factor, electric power of each electric phase and net electric power.

Figure 1 visualizes TOTEM 20 installed inside the laboratory, while Table 1 reports the characteristics of the adopted instrumentation in terms of manufacturer, model and uncertainty.

Testing of the micro-cogenerator TOTEM 20 manufactured by TOTEM Energy S.r.l.



Figure 1. TOTEM 20 under testing in the Laboratory of Micro-Cogeneration at Politecnico di Milano.

Table 1. Type and characteristics (manufacturer, model and uncertainty) of the adopted instrumentations (F.S. stands for full scale, R.V for read value).

Parameter	Unit	Instrument	Uncertainty
Ambient barometric pressure	hPa	Vaisala PTU300	$\pm 0,15$ hPa
Ambient temperature	$^{\circ}\text{C}$	Vaisala PTU300	$\pm 0,10$ $^{\circ}\text{C}$
Ambient relative humidity	%	Vaisala PTU300	$\pm 0,6\% \text{R}$ @0-40% RH, $\pm 1,0\% \text{RH}$ @40-97% RH
Natural gas pressure	mbar	Bronkhorst IN-PRESS P-502CI	$\pm (0,5\% \text{F.S.})$
Natural gas temperature	$^{\circ}\text{C}$	TC Direct Pt100 class 1/10 DIN	$\pm (0,03+0,05/100* T)$
Natural gas flow rate	$\text{Nm}^3 \text{h}^{-1}$	Bronkhorst IN-FLOW F-106BZ	$\pm 1\% \text{F.S.}$
Natural gas composition	%	Pollution micro gas chromatographer	2,00% su gas taratura
Exhaust gas temperature	$^{\circ}\text{C}$	TC Direct Pt100 class 1/10 DIN	$\pm (0,03+0,05/100* T)$
Water pressure	bar_A	Rosmount 2088 Pressure Trasmittter	$\pm 0,1$ span
Water pressure loss	bar	Rosemount 2051CF	$\pm (0,075\% \text{F.S.})$
Water mass flow rate	kg s^{-1}	Micromotion Coriolis Elite CMF100	$\pm (0,03\% \text{R.V.})$
Water inlet temperature	$^{\circ}\text{C}$	TC Direct Pt100 class 1/10 DIN	$\pm (0,03+0,05/100* T)$
Water outlet temperature	$^{\circ}\text{C}$	TC Direct Pt100 class 1/10 DIN	$\pm (0,03+0,05/100* T)$
Condensate mass over time	kg	Laumas elettronica TLS 420	$\pm 1\text{g}$
Electric phase 1	W	Fluke Norma 4000	$\pm 0,1\% \text{R.V.}$
Electric phase 2	W	Fluke Norma 4000	$\pm 0,1\% \text{R.V.}$
Electric phase 3	W	Fluke Norma 4000	$\pm 0,1\% \text{R.V.}$

2 Experimentation

The micro-cogenerator TOTEM 20 is installed inside the laboratory in the same manner as it would be installed at any end-user. The experimental protocol comprises: launching the laboratory systems, setting the parameters for the desired working condition via both the lab control system and the unit control panel, and starting the cogenerator. The steady state operation is reached when the inlet and the outlet temperatures of the cogenerator water as well as the temperature of exhaust gas vary within $\pm 0.5^\circ\text{C}$. Once steadiness is achieved, data acquisition starts. Natural gas compositions are recorded every about 3 minutes, while all other measurements every 2 seconds. A measurement of the natural gas composition, by way of gas chromatography, is accepted if the sum of the resulting molar fractions falls between 0.96 and 1.04. The test ends when at least three readings of the natural gas composition are accepted and when, if exhaust water condenses, at least 100 g of condensate water are collected. Typically, tests last between 10 to 20 minutes. As anticipated, in order to verify the measurement repeatability and improve the result confidence, a working condition is replicated at least four times over at least two different days.

At the end of a test, the average values of all measurements are computed over the test period. From the averaged values, mass and energy flows are reconstructed adopting conventional thermodynamic relations. Among them, the properties of natural gas are computed from the Shomate equation provided by the U.S. National Institute of Standards and Technology (NIST) [2], while those of water from the routines by the International Association for the Properties of Water and Steam (IAPWS) [3]. The computed Lower and Higher Heating Values (LHV and HHV) from NIST equations turn out to be in very strict agreement with the standard ISO 6976 [4]. Moreover, the molar flow rate of natural gas is corrected for the variable composition with the procedure defined by the manufacturer [5]. Ultimately, net electric and thermal efficiencies of the test can be calculated with respect to LHV and HHV. Simultaneously, instrument, combined and extended (coverage factor of 2) uncertainties are computed accordingly to ISO IEC GUIDE 98-3 [6].

Because tests for each working condition are replicated, there are diverse averages and performances for a condition (for instance, if there are five tests for a condition, there are five net electric and thermal powers as well as five net electric and thermal efficiencies). Hence, tests are verified for *compatibility*. The compatibility verification requires, in sequence, to plot selected properties for all tests at a given working condition showing the extended uncertainty intervals about those properties. Then, the mean values and the standard deviations of the properties are computed; from these summary statistics, assuming a Student's t-distribution of the properties, the confidence intervals at a desired confidence level are plot about the mean values. A test for a working condition is *compatible* with all other tests for the same working condition if its extended uncertainty interval overlaps with the confidence interval for all the selected properties. The selected properties for the compatibility verification are: heat input rate, net electrical power, thermal power, net electric efficiency and thermal efficiency. The adopted confidence level is 95%.

Testing of the micro-cogenerator TOTEM 20 manufactured by TOTEM Energy S.r.l.

For sake of clarity, Figure 2 shows the compatibility verification of the test at the working condition of the net electric power at 20 kW and the inlet temperature of the cogeneration water at 35°C for two selected properties: the net electric efficiency (top) and the thermal efficiency (bottom), both with respect to LHV.

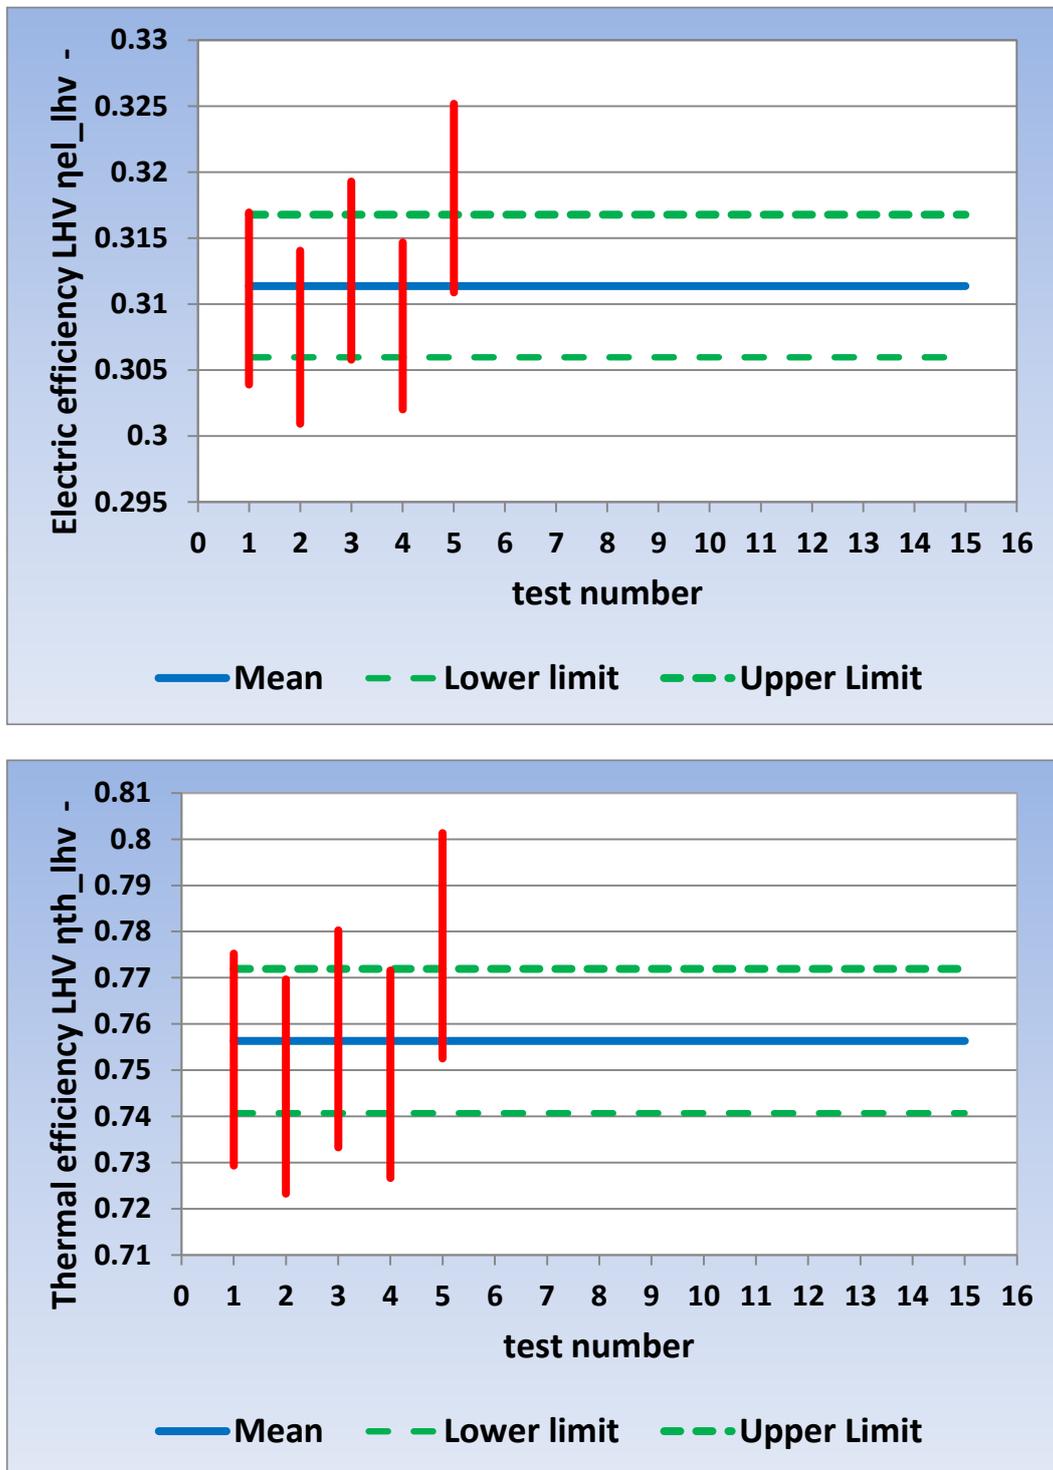


Figure 2. Compatibility verification of the tests at 20 kW electric load and 35°C water inlet for the net electric efficiency (top) and the thermal efficiency (bottom), both with respect to LHV.

3 Results

Based on the methodology outlined previously, the experimental results from the campaign on the micro-cogenerator TOTEM 20 are reported in this section. Table 2 shows the mean values and the 95%-confidence intervals of the main parameters at the working conditions of all net electric powers and of the inlet temperature of the cogeneration water at 35°C. Table 3 shows the values of the temperature at 70°C. All the tests executed for each working condition have been verified to be compatible.

Table 2. Mean values and 95%-confidence interval of the main parameters at the working conditions of all net electric powers and of the inlet temperature of the cogeneration water at 35°C.

Water inlet temperature (setpoint)		35°C					
Net electrical power (setpoint)		5 kW	7.5 kW	10 kW	15 kW	20 kW	25 kW
Number of <i>compatible</i> tests		4	5	5	4	5	4
Cogeneration inlet	Unit						
Natural gas flow rate	Nl min ⁻¹	45 ±0.8	54.1 ±0.4	63.8 ±0.8	83.5 ±0.9	104.4 ±2.3	125.9 ±2.7
"	Nm ³ h ⁻¹	2.7 ±0.05	3.24 ±0.02	3.83 ±0.05	5.01 ±0.05	6.27 ±0.14	7.56 ±0.16
Nat. gas Lower Heating Value	kJ mol ⁻¹	818 ±8	820 ±4	820 ±5	818 ±13	824 ±4	815 ±6
"	MJ kg ⁻¹	47.2 ±1.1	46.8 ±0.6	46.9 ±0.8	47.8 ±0.8	46.6 ±0.3	47.6 ±0.8
"	kWh Nm ⁻³	10.14 ±0.10	10.17 ±0.05	10.17 ±0.06	10.08 ±0.10	10.22 ±0.05	10.1 ±0.07
Nat. gas Higher Heating Value	kJ mol ⁻¹	906 ±8	909 ±4	909 ±5	906 ±13	913 ±4	903 ±6
"	MJ kg ⁻¹	52.3 ±1.2	51.9 ±0.6	52 ±0.9	53 ±0.9	51.6 ±0.3	52.7 ±0.9
"	kWh Nm ⁻³	11.2 ±0.10	11.26 ±0.05	11.26 ±0.07	11.18 ±0.10	11.31 ±0.06	11.2 ±0.07
Heat input rate (LHV)	kW	27.4 ±0.3	33.0 ±0.2	38.9 ±0.3	50.5 ±0.2	64.0 ±1.2	76.3 ±1.2
Heat input rate (HHV)	kW	30.3 ±0.3	36.5 ±0.2	43.1 ±0.4	55.9 ±0.2	70.9 ±1.3	84.6 ±1.3
Cogen water flow rate	kg s ⁻¹	1.11 ±0.01	1.114 ±0.004	1.112 ±0.003	1.112 ±0.002	1.111 ±0.004	1.109 ±0.003
Cogen water inlet temp. (meas.)	°C	35.00 ±0.005	34.98 ±0.002	34.98 ±0.002	34.97 ±0.002	35.00 ±0.006	35.01 ±0.013
Cogeneration outlet	Unit						
Net electrical power (measured)	kW	4.96 ±0.08	7.45 ±0.04	9.94 ±0.09	14.90 ±0.05	19.93 ±0.06	24.83 ±0.07
Cogen water outlet temp.	°C	40.02 ±0.08	40.80 ±0.04	41.64 ±0.05	43.49 ±0.05	45.44 ±0.06	47.45 ±0.09
Cogen water pressure drop	mbar	266.2 ±2.8	266.4 ±1.6	265 ±1.3	264.6 ±1.0	263.5 ±1.8	262.3 ±1.7
Thermal power	kW	23.4 ±0.4	27.1 ±0.2	30.9 ±0.2	39.6 ±0.2	48.4 ±0.2	57.6 ±0.5
Condensate mass flow rate	kg h ⁻¹	1.22 ±0.09	1.42 ±0.04	1.9 ±0.7	2.2 ±0.2	3.04 ±0.7	3.14 ±0.09
Energy performances							
Net electrical efficiency (LHV) -		0.181 ±0.002	0.226 ±0.002	0.255 ±0.004	0.295 ±0.0003	0.311 ±0.005	0.325 ±0.005
Net electrical efficiency (HHV) -		0.164 ±0.001	0.204 ±0.002	0.230 ±0.003	0.266 ±0.0003	0.281 ±0.005	0.294 ±0.004
Thermal efficiency (LHV) -		0.857 ±0.009	0.821 ±0.005	0.794 ±0.008	0.783 ±0.006	0.756 ±0.016	0.749 ±0.025
Thermal efficiency (HHV) -		0.773 ±0.008	0.741 ±0.004	0.717 ±0.007	0.706 ±0.005	0.683 ±0.014	0.676 ±0.023
Total efficiency (LHV) -		1.038 ±0.009	1.046 ±0.006	1.050 ±0.011	1.078 ±0.005	1.068 ±0.021	1.074 ±0.029
Total efficiency (HHV) -		0.937 ±0.008	0.945 ±0.005	0.948 ±0.010	0.973 ±0.005	0.964 ±0.019	0.969 ±0.026

Testing of the micro-cogenerator TOTEM 20 manufactured by TOTEM Energy S.r.l.

Table 3. Mean values and 95%-confidence interval of the main parameters at the working conditions of all net electric powers and of the inlet temperature of the cogeneration water at 70°C.

Water inlet temperature (setpoint)		70°C					
Net electrical power (setpoint)		5 kW	7.5 kW	10 kW	15 kW	20 kW	25 kW
Number of <i>compatible</i> tests		5	4	4	4	5	5
Cogeneration inlet		Unit					
Natural gas flow rate	Nl min ⁻¹	45.1 ±0.7	54.5 ±0.8	64.1 ±0.7	83.4 ±0.6	104.1 ±1.4	125.6 ±1.3
"	Nm ³ h ⁻¹	2.71 ±0.04	3.27 ±0.05	3.84 ±0.04	5.01 ±0.04	6.25 ±0.08	7.54 ±0.08
Nat. gas Lower Heating Value	kJ mol ⁻¹	820 ±4	821 ±2	818 ±4	816 ±9	824 ±3	820 ±4
"	MJ kg ⁻¹	47.5 ±0.7	46.6 ±0.3	47.1 ±1.1	47.3 ±1.4	46.7 ±0.4	46.9 ±0.8
"	kWh Nm ⁻³	10.16 ±0.05	10.17 ±0.02	10.14 ±0.05	10.11 ±0.11	10.21 ±0.04	10.17 ±0.05
Nat. gas Higher Heating Value	kJ mol ⁻¹	908 ±4	909 ±2	907 ±4	904 ±9	913 ±3	907 ±4
"	MJ kg ⁻¹	52.6 ±0.8	51.6 ±0.3	52.1 ±1.2	52.5 ±1.6	51.7 ±0.4	52 ±0.9
"	kWh Nm ⁻³	11.25 ±0.05	11.27 ±0.03	11.24 ±0.06	11.2 ±0.12	11.31 ±0.04	11.26 ±0.05
Heat input rate (LHV)	kW	27.5 ±0.5	33.3 ±0.6	39.0 ±0.3	50.6 ±0.2	63.8 ±1.0	76.6 ±0.7
Heat input rate (HHV)	kW	30.5 ±0.5	36.9 ±0.6	43.2 ±0.4	56.1 ±0.2	70.7 ±1.1	84.9 ±0.8
Cogen water flow rate	kg s ⁻¹	1.15 ±0.06	1.111 ±0.004	1.110 ±0.002	1.113 ±0.004	1.109 ±0.003	1.117 ±0.023
Cogen water inlet temp. (meas.)	°C	70.02 ±0.03	70.02 ±0.03	70.03 ±0.02	70.02 ±0.08	70.02 ±0.01	70.01 ±0.03
Cogeneration outlet		Unit					
Net electrical power (measured)	kW	5.01 ±0.17	7.42 ±0.02	9.83 ±0.05	14.91 ±0.06	19.88 ±0.04	24.85 ±0.09
Cogen water outlet temp.	°C	74.28 ±0.26	75.09 ±0.05	75.84 ±0.06	77.36 ±0.14	78.99 ±0.03	80.70 ±0.19
Cogen water pressure drop	bar	273±28	256.1 ±1.7	255.9 ±1.2	256.9 ±1.6	255 ±1.8	258 ±10
Thermal power	kW	20.4 ±0.2	23.5 ±0.3	27 ±0.3	34.3 ±0.5	41.7 ±0.04	50 ±0.4
Condensate mass flow rate	kg h ⁻¹	0 ±0	0 ±0	0 ±0	0 ±0	0 ±0	0 ±0
Energy performances							
Net electrical efficiency (LHV) -		0.182 ±0.005	0.223 ±0.004	0.252 ±0.003	0.295 ±0.001	0.312 ±0.005	0.324 ±0.003
Net electrical efficiency (HHV) -		0.165 ±0.005	0.201 ±0.004	0.228 ±0.003	0.266 ±0.001	0.281 ±0.004	0.293 ±0.003
Thermal efficiency (LHV) -		0.742 ±0.006	0.708 ±0.018	0.692 ±0.008	0.677 ±0.010	0.653 ±0.010	0.653 ±0.007
Thermal efficiency (HHV) -		0.670 ±0.005	0.639 ±0.016	0.625 ±0.007	0.611 ±0.008	0.590 ±0.009	0.589 ±0.006
Total efficiency (LHV) -		0.924 ±0.008	0.931 ±0.022	0.944 ±0.011	0.972 ±0.010	0.965 ±0.015	0.977 ±0.009
Total efficiency (HHV) -		0.834 ±0.007	0.840 ±0.020	0.852 ±0.010	0.877 ±0.008	0.871 ±0.013	0.882 ±0.008

The electric consumption of the auxiliaries is not measured during the tests, but it is approximated as the measured electric consumption of the cogenerator in the minutes following a shut-down. Consequently, gross electric power and efficiency for all tests can be estimated as reported in Table 4 and Table 5. Given the estimation, the uncertainty on the gross power and efficiency cannot be quantified appropriately.

Table 4. Estimated gross electrical power and efficiencies at the working conditions of all net electric powers and of the inlet temperature of the cogeneration water at 35°C.

Water inlet temperature (setpoint)		35°C					
Net electrical power (setpoint)		5 kW	7.5 kW	10 kW	15 kW	20 kW	25 kW
Auxiliary electric consumption	kW	0.205	0.205	0.205	0.205	0.205	0.205
Gross electric power	kW	5.17	7.66	10.15	15.11	20.14	25.04
Gross electric efficiency (LHV) -		0.1885	0.2320	0.2608	0.2991	0.3146	0.3281

Testing of the micro-cogenerator TOTEM 20 manufactured by TOTEM Energy S.r.l.

Table 5. Estimated gross electrical power and efficiencies at the working conditions of all net electric powers and of the inlet temperature of the cogeneration water at 70°C.

Water inlet temperature (setpoint)	70°C					
Net electrical power (setpoint)	5 kW	7.5 kW	10 kW	15 kW	20 kW	25 kW
Auxiliary electric consumption kW	0.205	0.205	0.205	0.205	0.205	0.205
Gross electric power kW	5.22	7.63	10.04	15.12	20.09	25.06
Gross electric efficiency (LHV)-	0.1896	0.2290	0.2573	0.2987	0.3148	0.3271

4 Conclusions

A micro-cogenerator TOTEM 20 manufactured by TOTEM Energy has been tested experimentally at the Laboratory of Micro-Cogeneration of Politecnico di Milano to determine its energy performances under diverse working conditions. A working condition is defined by the controlled parameters: temperature of the ambient air at 25°C; mass flow rate of the cogeneration water at 1.11 kg s⁻¹ (that is 4.00 m³ h⁻¹) and inlet temperature of the cogeneration water at alternatively 35 and 70°C; net electric power at alternatively 5, 7.5, 10, 15, 20 and 25 kW. Every working condition has been verified repeatedly at least four times over at least two different days. Tests have been carried out positively versus all the assumed working conditions, deriving the energy performances reported in Table 2 and in Table 3.

5 Bibliography

- [1] S. Campanari, G. Valenti, E. Macchi, G. Lozza and A. Ravidà, "Development of a micro-cogeneration laboratory and testing of a natural gas CHP unit based on PEM fuel cells," *Applied Thermal Engineering*, vol. 71, pp. 714-720, 2014.
- [2] NIST - National Institute of Standards and Technology, "Chemistry WebBook," [Online]. Available: <http://webbook.nist.gov/chemistry/>.
- [3] IAPWS -The International Association for the Properties of Water and Steam, *Revised Release on the IAPWS Industrial Formulation 1997 for the Thermodynamic Properties of Water and Steam*, Lucerna, 2007.
- [4] International Standard Organization, *ISO 6976: Calculation of caloric values, density, relative density*

Testing of the micro-cogenerator TOTEM 20 manufactured by TOTEM Energy S.r.l.

and Wobbe index from composition, 1997.

[5] Bronkhorst, "Operation instructions digital Mass Flow / Pressure instruments parameters and properties," 2010.

[6] ISO - International Standard Organization, Guide to the expression of uncertainty in measurement (GUM), Ginevra: ISO, 2008.

Reference author

Prof. Gianluca Valenti. Politecnico di Milano – Dip. Energia, Via R. Lambruschini 4A, 20156, Milano (ITALY).

Phone: +39-02-2399.3845, email: gianluca.valenti@polimi.it, web: www.gecos.polimi.it